



924 Calle Negocio • Unit A
San Clemente, CA 92673
Phone: (949) 366-3070 • Fax: (949) 366-3069
www.aggregatemachineryspecialist.net

Portable 60 x 24 Rip Rap Plant

- Telsmith 60" x 24' VGF (2)5' adjustable Rip Rap Grizzly Sections 4" 1st step /12" 2nd step
- I-Beam Construction
- ¾" Plate Hopper Construction 18 Yards Struck
- 50 HP Motor
- 10' Wide x 14' Tall Travel Dimensions
- 10' Wide Axle Stance 11:00-22.5 Tires, 10-Hole Hub Pilot Rims
- Brakes, Lights and Flaps
- Motor control panel, skid mount with power cable to 50 HP VFG motor, variable frequency drive, 3 motor controls (15 Hp, 20 HP, and 25 HP) for off plant equipment

PURCHASE PRICE:


\$279,750.00

Rental Rate:

\$ 15,000.00

AMS Item 16592. Terms are Net 10 Days after receipt of equipment, subject to prior credit approval. Sales tax is additional and charged at the appropriate rate. Freight is also additional and charged at our actual cost.



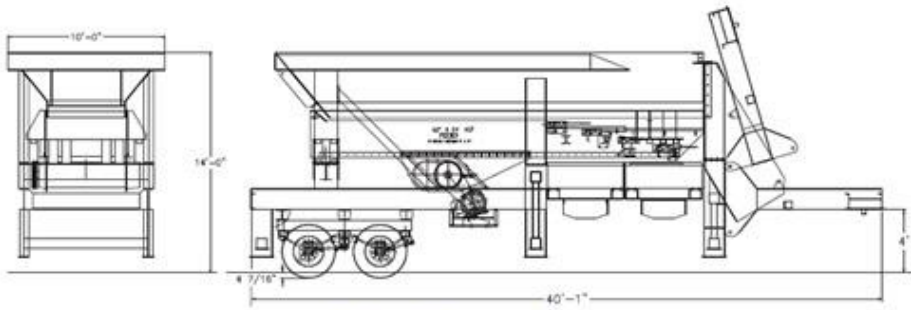

Travel Dimensions

- Length - 40' 2 1/4"
- Width - 10'
- Height - 14'
- Kingpin Weight
- Tandem Axel Weight
- Axel Spacing - 4'- 6"



Product / Application

- 4" to 12" Rip Rap
- Decorative Stone
- Erosion Control

**Durable Design,
Heavy Duty
Construction**

Plant Standard Features:

- I-Beam Construction
- Heavy Plate Hopper Construction 18 Yards Struck
- Designed to accommodate 24-26 foot vibrating grizzly feeder
- 10' Wide x 14' Tall Travel Dimensions
- 10' Wide Axle Stance 11:00-22.5 Tires,
- Brakes, Lights and Flaps

Other Optional Equipment:

- Power Control panel
- Rear load-out hopper (1 pc. Design)
- 42"x20' Under Conveyor (first step)
- Variable Speed Controller

